



Industrial Filtration Solutions

Complete Wire Mesh Product Catalog

40+

Years of Expertise

10,000+

SKUs in Stock

7

Product Categories

5

Branches Pan-India

India's Most Complete Wire Mesh Partner

Banaraswala Wire Mesh P Limited was established in 1986 with a single mission: to be the most reliable source of wire mesh products in India. Over four decades, we have grown from a single trading office to a vertically integrated manufacturer and distributor with two production facilities and five branches serving over 10,000 customers across the country.

Our factories in Coimbatore and Navi Mumbai are equipped with weaving looms, punching presses, welding machines, and finishing lines spread across 1 lakh square feet. Combined with our branch network in Coimbatore, Mumbai, Chennai, Ahmedabad, and Hyderabad, we deliver the right product in the right specification within 24 hours to 80% of industrial India.



Coimbatore Factory — Weaving Looms



Navi Mumbai Factory — Crimping Machine

2

Manufacturing
Facilities

5

Branches
Pan-India

1 Lakh

Sq Ft Production
Capacity

500+

Staff Across
All Locations

ISO 9001:2015 Certified

Consistent quality management across all manufacturing and distribution operations.

Six Reasons to Choose BWM

1 40 Years of Expertise

Est. 1986. Deep application knowledge across mining, pharma, food processing, paper, chemical, and construction industries. We don't just sell mesh — we solve filtration and separation problems.

2 Complete Product Range

One vendor for all wire mesh products. 10,000+ SKUs across 7 product categories — woven mesh, welded mesh, vibrating screen, perforated sheets, expanded metal, chain link fencing, and accessories.

3 Pan-India Delivery

5 branches and 2 factories strategically located. Same-day dispatch on stock items. Less than 24-hour delivery to 80% of industrial India.

4 Ready Stock + Make to Order

Standard items available ex-stock for immediate dispatch. Custom specifications manufactured with dedicated engineering support and fast turnaround.

5 ISO 9001:2015 Certified

Documented processes, in-house testing, and full material traceability. Consistent quality management means fewer rejections and reliable supply.

6 Technical Partnership

Application engineering support to help you select the right mesh specification for your specific needs — reducing costly trial and error. We are partners, not just suppliers.

We help manufacturers, contractors, and infrastructure companies get the right wire mesh product — in the right spec, at the right time — reducing procurement hassle and project delays.

Our Product Range

7 product categories covering every wire mesh application




Woven Wire Mesh

1–2300 Mesh | 8+ Materials | 3 Weave Types

Precision-woven filtration from 2 micron to 22mm opening. Plain, twill, and dutch weave in SS, brass, monel, and more.

Pages 6-7

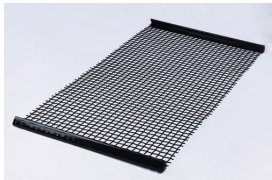

Vibrating Screen Mesh

2–100mm Aperture | SPS/SS | OEM Compatible

High-tensile spring steel screening for mining, quarrying, and crushing. Compatible with Metso, Propel, Sandvik, and other OEMs.

Pages 8-9




Welded Wire Mesh

1–6mm Wire | 15mm–6in Mesh | SS/GI/MS

High-strength welded mesh for construction reinforcement, fencing, guards, gabion baskets, and machine shielding.

Pages 10-11

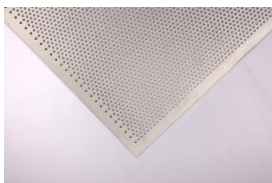


Perforated Sheets

0.5–100mm Hole | 0.35–12mm Thick | 6 Materials

Precision-punched sheets in round, square, slot, and hex patterns for filtration, ventilation, and architectural use.

Pages 12-13

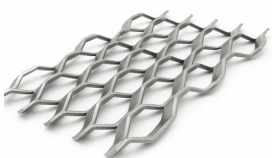


Expanded Metal

3–200mm LWD | 0.2–6mm Thick | 4 Materials

Diamond-pattern mesh for grating, walkways, fencing, cable trays, and architectural facades.

Pages 14-15

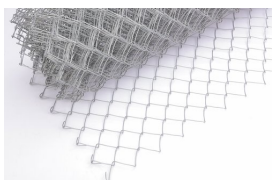

Chain Link Fencing

2–4in Opening | GI/PVC | 2–8ft Height

Durable galvanised and PVC-coated fencing for industrial perimeter, construction sites, agriculture, and sports grounds.

Pages 16-17

Trusted Across Industries

Application expertise built over 40 years of serving diverse sectors

Mining & Quarrying

Vibrating screen mesh, woven mesh for classification and dewatering. OEM-compatible screens for Metso, Propel, Sandvik crushers.

Food Processing

SS304/316 woven and perforated sheets for grain grading, flour sifting, oil filtration. Food-safe materials throughout.

Construction & Infrastructure

Welded mesh for RCC reinforcement. Chain link for perimeter fencing. Expanded metal for walkways and cable trays.

Paper & Pulp

Forming fabrics. Woven mesh for stock screening. SS304 for white liquor filtration.

Agriculture

Chain link fencing for farm boundaries. Woven mesh for seed grading. Welded mesh for animal enclosures.

Pharmaceuticals

Fine woven mesh (100–500 mesh) for powder sieving. SS316L for corrosion resistance. GMP-compatible specifications.

Chemical & Petrochemical

Dutch weave mesh for catalyst support. Monel and SS316 for severe corrosion environments. Filtration down to 2 micron.

Automobile & Engineering

Perforated sheets for silencers and filters. Expanded metal for battery grids. Woven mesh for oil filtration.

Water Treatment

Woven and welded mesh for inlet screening. Perforated sheets for filter press plates. Multi-layer Dutch weave filters.

Architecture & Interiors

Perforated sheets for facades and ceilings. Expanded metal cladding. Decorative woven mesh panels.

Woven Wire Mesh

Precision-woven filtration and separation solutions



1-2300

Mesh Range

8+

Materials

0.002mm

Min Opening

3 Types

Weave Patterns

KEY APPLICATIONS

- Industrial filtration — liquid & gas filtration, oil separation
- Screening & sieving — mining, pharma, food processing
- Insect screening — residential & commercial airflow protection
- Security & fencing — machine guards, enclosures, panels
- Laboratory testing — precision test sieves (ASTM, Tyler, BSS)

AVAILABLE MATERIALS

SS 304/304L	General purpose
SS 316/316L	Chemical/marine
SS 310	High temperature
Brass	Non-sparking, EMI
Phosphor Bronze	Spring filtration
Monel	Severe corrosion
Aluminium	Lightweight
GI	Cost-effective outdoor

ORDER TYPE Ready Stock | Make to Order | Custom Specifications

Download full technical datasheet at www.banaraswala.com/products



Plain Weave — Technical Specifications

Standard material: SS 304, SS 304L, SS 316, SS 316L, SS 310. Ready stock in standard widths.

COARSE & MEDIUM MESH (1-20) — 45 variants

Mesh	SWG	Wire mm	Open mm	Open %
1	-	3.0	22.4	77%
1	-	2.5	22.9	81%
2	-	3.0	9.7	58%
2	-	2.5	10.2	64%
2	14	2.0	10.7	70%
3	-	2.5	5.96	49%
3	14	2.0	6.46	58%
3	-	1.5	6.96	67%
4	14	2.0	4.35	46%
4	-	1.5	4.85	58%
4	18	1.2	5.15	65%
4	20	0.9	5.45	73%
5	14	2.0	3.08	36%
5	-	1.5	3.58	49%
5	18	1.2	3.88	58%
6	-	1.5	2.73	41%
6	18	1.2	3.03	51%
6	20	0.9	3.33	62%
8	-	1.5	1.67	27%
8	18	1.2	1.97	38%
8	20	0.9	2.27	51%
8	22	0.7	2.47	60%
8	25	0.5	2.67	70%
10	20	0.9	1.64	41%
10	22	0.7	1.84	52%
10	25	0.5	2.04	64%
12	22	0.7	1.41	44%
12	24	0.55	1.56	54%
12	26	0.45	1.66	62%
14	24	0.55	1.26	48%
14	25	0.5	1.31	52%
14	27	0.4	1.41	60%
16	25	0.5	1.08	46%
16	27	0.4	1.18	55%
16	30	0.3	1.28	65%
16	33	0.25	1.33	70%
18	25	0.5	0.91	41%
18	27	0.4	1.01	51%
18	30	0.3	1.11	62%
18	33	0.25	1.16	67%
20	25	0.5	0.77	36%
20	27	0.4	0.87	46%
20	30	0.3	0.97	58%
20	33	0.25	1.02	64%
20	36	0.19	1.08	72%

FINE & VERY FINE MESH (24-500) — 33 variants

Mesh	SWG	Wire mm	Open mm	Open %
24	27	0.4	0.65	38%
24	28	0.37	0.68	42%
24	30	0.3	0.75	51%
24	32	0.27	0.78	55%
30	28	0.37	0.47	31%
30	30	0.3	0.54	41%
30	32	0.27	0.57	46%
30	34	0.22	0.62	54%
30	36	0.19	0.65	60%
36	33	0.25	0.45	41%
36	34	0.22	0.48	47%
36	36	0.19	0.51	53%
40	32	0.27	0.36	33%
40	34	0.22	0.41	42%
40	36	0.19	0.44	49%
50	34	0.22	0.28	32%
50	36	0.19	0.31	39%
50	38	0.15	0.35	49%
60	36	0.19	0.23	30%
60	38	0.15	0.27	41%
80	40	0.12	0.19	38%
80	42	0.1	0.21	46%
100	42	0.1	0.15	36%
100	44	0.08	0.17	46%
120	44	0.08	0.13	38%
150	45	0.07	0.09	34%
150	46	0.06	0.1	41%
200	47	0.05	0.077	36%
250	48	0.04	0.061	36%
300	48	0.04	0.044	27%
325	-	0.035	0.043	30%
400	49	0.03	0.033	27%
500	50	0.025	0.025	25%

Dutch & Twill Weave — Technical Specifications

Manufactured in SS 304 and SS 316. Custom widths available.

Mesh Count	Warp mm	Weft mm	Weave	Micron	Thick mm	Porosity	ASTM um
12 x 64	0.60	0.41	PDW	250	1.44	66%	284
24 x 110	0.38	0.25	PDW	110	0.88	65%	137
30 x 150	0.22	0.17	PDW	90	0.55	66%	113
40 x 200	0.17	0.13	PDW	70	0.43	63%	85
50 x 250	0.13	0.11	PDW	55	0.35	65%	63
80 x 400	0.12	0.07	PDW	40	0.25	59%	50
100 x 600	0.14	0.04	PDW	25	0.33	45%	40
325 x 2300	0.03	0.02	TDW	2	0.10	36%	9
200 x 1400	0.07	0.04	TDW	5	0.15	36%	15
165 x 1400	0.07	0.04	TDW	10	0.15	37%	26
165 x 800	0.07	0.05	B-TDW	25	0.17	54%	30
200 x 600	0.05	0.04	B-TDW	30	0.15	62%	35
80 x 700	0.10	0.07	TDW	35	0.27	44%	42


PDW = Plain Dutch Weave

TDW = Twill Dutch Weave

B-TDW = Broad Twill Dutch Weave

Vibrating Screen Mesh

High-tensile spring steel screening for mining, quarrying and construction

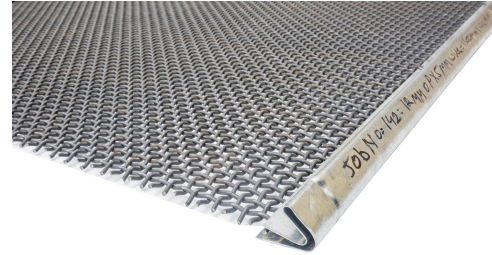

2-100mm

Aperture Range

0.9-10mm

Wire Dia

SPS/SS

Materials

OEM

Compatible

KEY APPLICATIONS

- Mining and quarrying — aggregate screening
- Crushing plants — particle classification
- Sand and gravel processing
- Cement and mineral processing
- Stone crusher OEM replacement

AVAILABLE MATERIALS

Spring Steel (SPS)	TATA / Usha Martin
SS 304	Corrosion-resistant
SS 310	High temperature
SS 316	Chemical environments
GI	Cost-effective

ORDER TYPE Ready Stock | Make to Order | Custom Specifications

Download full technical datasheet at www.banaraswala.com/products



Aperture mm	Wire Dia mm	Aperture mm	Wire Dia mm	Aperture mm	Wire Dia mm	Aperture mm	Wire Dia mm
2	0.9	10	6	20	6	28	10
2.5	1.4	12	3	20	7	30	6
3	2	12	4	22	5	32	6-10
4	2.5	12	5	22	6	34	8-10
4	3	12	6	22	7	36	8-10
5	2	14	4	22	8	38	8-10
5	2.5	14	5	24	5	40	8-10
5	3	14	6	24	6	42	8-10
6	2.5	14	7	24	7	44	8-10
6	3	16	4	24	8	46	8-10
6	4	16	5	24	10	48	8-10
7	3	16	6	26	5	50	8-10
7	4	16	7	26	6	54	8-10
8	3	18	4	26	7	60	8-10
8	4	18	5	26	8	63	8-10
8	5	18	6	26	10	70	8-10
10	3	18	7	28	6	80	8-10
10	4	18	8	28	7	90	8-10
10	5	20	5	28	8	100	8-10

OEM COMPATIBILITY: Metso | Puzzolana | Sandvik Asia | Propel | Hailstone

Welded Wire Mesh

High-strength welded mesh for construction, fencing and industrial use



1-6mm

Wire Dia Range

15mm-6in

Mesh Size Range

3+

Materials

Custom

Sizes Available

KEY APPLICATIONS

- Reinforcing concrete structures
- Fencing, guards, and enclosures
- Safety barriers and partitions
- Gabion baskets and retaining walls
- Machine guarding and shielding

AVAILABLE MATERIALS

Stainless Steel	Corrosion-resistant
Galvanised Steel	Outdoor durability
Mild Steel	Cost-effective
MS Hot Rolled	High strength
MS Hot Bright	Clean finish

ORDER TYPE Ready Stock | Make to Order | Custom Specifications



Download full technical datasheet at www.banaraswala.com/products

S.No	Pitch	Opening	Wire Dia	Width mm	Wt/sqm	Wt 50ft Roll
1	27.5	25.5	2	915	1.85	26.0
2	27.5	25.5	2	1220	1.85	34.5
3	27.5	25.5	2	1524	1.85	43.0
4	27.5	25.1	2.4	915	2.66	37.0
5	27.5	25.1	2.4	1220	2.66	49.5
6	27.5	25.1	2.4	1524	2.66	62.0
7	27.5	24.6	2.9	915	3.88	54.0
8	27.5	24.6	2.9	1220	3.88	72.0
9	27.5	24.6	2.9	1524	3.88	90.0
10	35	32.5	2.5	915	2.27	31.5
11	35	32.5	2.5	1220	2.27	42.0
12	35	32.5	2.5	1524	2.27	52.5
14	35	32.5	2.5	1830	2.27	63.0
15	35	32.1	2.9	915	3.05	42.5
16	35	32.1	2.9	1220	3.05	56.5
17	35	32.1	2.9	1524	3.05	71.0
18	35	32.1	2.9	1830	3.05	85.0
19	35	31.5	3.5	915	4.45	62.0
20	35	31.5	3.5	1220	4.45	82.5
21	35	31.5	3.5	1524	4.45	103.0
22	35	31.5	3.5	1830	4.45	124.0
23	40	36	4	915	5.08	71.0
24	40	36	4	1220	5.08	94.5
25	40	37.1	2.9	915	2.67	37.0
26	40	37.1	2.9	1220	2.67	49.5
27	40	37.1	2.9	1524	2.67	62.0
28	50	47.6	2.4	915	1.46	20.5
29	50	47.6	2.4	1220	1.46	27.0
30	50	47.6	2.4	1524	1.46	34.0

* Customized sizes available on demand. All dimensions in mm. Weights are approximate.

Perforated Sheets

Precision-manufactured perforation for filtration, ventilation and architecture

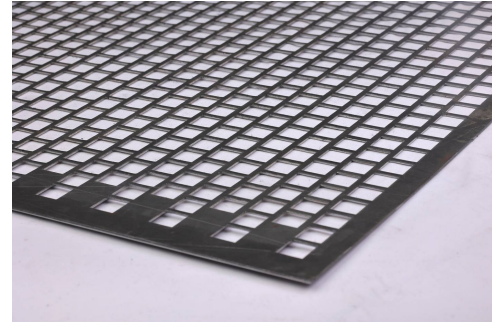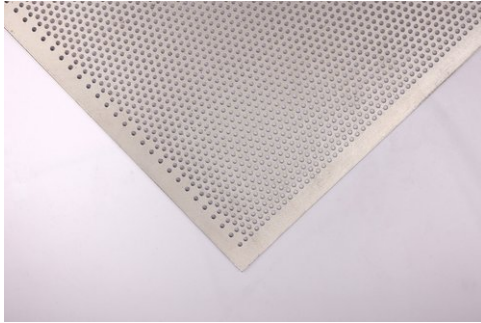

0.5-100mm

Hole Dia

0.35-12mm

Thickness

4 Shapes

Round/Sq/Slot/Hex

6

Materials

KEY APPLICATIONS

- Air and liquid filtration systems
- Noise reduction and sound absorption
- Architectural facades and decorative panels
- Food processing equipment
- Automobile and engineering components

AVAILABLE MATERIALS

SS 304	General purpose
SS 316	Chemical-resistant
MS HR	Cost-effective
MS CRCA	Clean finish
GI	Outdoor use
Aluminium	Lightweight
Brass	Decorative

ORDER TYPE Ready Stock | Make to Order | Custom Specifications

Download full technical datasheet at www.banaraswala.com/products

Hole (D)	Pitch (P)	Open Area %
0.5	1.1	18.74
0.8	1.4	29.61
0.9	1.4	37.48
1	1.7	31.38
1.2	2	32.65
1.5	2.5	32.65
1.8	3.5	23.99
2	4	22.67
2.2	4	27.43
2.5	4.5	27.99
3	5	32.65
3.2	6.5	21.98
4	6.5	34.34
4.5	6.5	43.47
5	8	35.43
6	9	40.31

Hole (D)	Pitch (P)	Open Area %
7	13	26.29
8	11.5	43.89
10	12	62.98
10	15	40.31
10	20	22.67
12	18	40.31
15	25	32.65
16	25	37.15
18	25	47.01
20	30	40.31
25	35	46.27
28	39	46.75
30	50	32.65
50	65	53.66
65	80	59.87
80	100	58.04



STANDARD SHEET SIZES

1.25 x 2.5 Meter | 1.5 x 3 Meter | 1 x 2 Meter | Custom sizes on request

Hole shapes: Round, Square, Slot, Hex | Pitch types: Staggered/Triangular, Straight

Expanded Metal

Versatile diamond-pattern mesh for grating, fencing, filtration and architecture

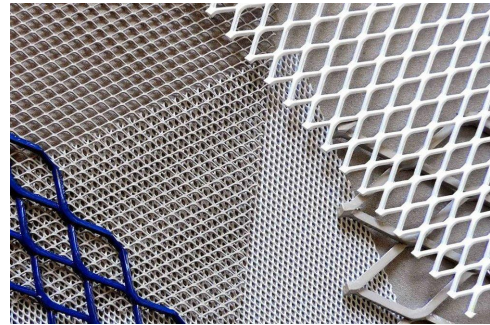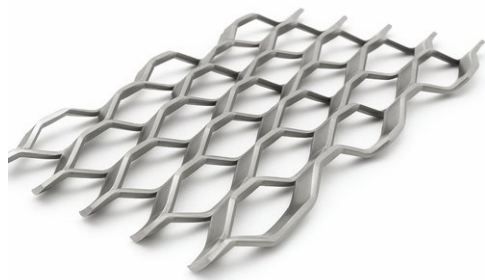

3-200mm

LWD Range

1.5-75mm

SWD Range

0.2-6mm

Thickness

4

Materials

KEY APPLICATIONS

- Fencing, grating, and walkways
- Machine guards and safety enclosures
- Filtration and ventilation panels
- Architectural facades and cladding
- Cable trays and battery grids

AVAILABLE MATERIALS

- | | |
|-------------------------|---------------------|
| Stainless Steel | Corrosion-resistant |
| Mild Steel | Cost-effective |
| Aluminium | Lightweight |
| Galvanised Steel | Outdoor durability |

ORDER TYPE Ready Stock | Make to Order | Custom Specifications

Download full technical datasheet at www.banaraswala.com/products



Complete Size Range

LWD 3 mm to 200 mm | All dimensions in millimeters | Standard sheet: 4' x 8'


LWD	SWD	Thick.	Strand W.
3	1.5	0.3	0.6
3	1.5	0.5	7
4	2	0.7	0.5
4	2	0.7	1
4.37	2	0.5	0.6
5	2	0.5	1
5	3	0.25	0.3
5	3	0.4	0.5
6	3	0.25	0.3
6	3	0.25	3
6	3	0.35	0.3
6	3	0.35	0.4
6	3	0.35	2
6	3	1.2	0.3
6	3	0.3	0.5
7.4	4.5	1	1
8	5	0.6	2
10	1.73	1.6	2
10	5	0.8	1
10	5	1	0.8
10	6	0.3	0.5
10	6	0.5	0.8
12	6	2	2.5
12	23	1.15	2
12	27	1.5	1.5
12	28	1.5	1.5
12	30	2.24	3
12	30	3	2.2
13	4	0.9	1
13	8	1	1.5
13.5	4.5	0.9	1
14	8	0.6	0.7
14	8	0.6	0.8
14	8	0.8	1
14	8	1	0.8
15	8	0.5	0.8
15	8	0.8	1
15	9	1.2	2.6
15	9	1.5	6
16	1	0.2	0.3
16	9	0.6	1
17	8	1.2	1.5
18	10	0.6	1
20	10	0.5	1
20	10	2.24	3
25	10	1	1.5
25	10	1.2	2.5
25	10	1.5	1.5
25	10	1.6	3.25
25	12.5	0.8	1.1
25	12.5	1.3	1.5
25	12.5	1.5	1.5
25	12	1.5	1.9
25	12	1.5	3
28	12	0.4	0.2
28	12	0.4	0.5
28	12	0.7	1
28	12	2	2
28	16	1.5	2
30	10	3	5
30	12	2	1.5
30	12	2	2.2
30	12	3	2.2
30	13	2	3

LWD	SWD	Thick.	Strand W.
30	15	0.3	0.6
30	15	1.2	2.2
35	17	2.5	2
40	10	1.5	2.8
40	10	1.5	3
40	10	1.5	3.2
40	10	1.5	3.25
40	10	1.6	3.2
40	10	3	3
40	10	4	4
40	12	1.5	2
40	12	1.5	3.2
40	15	2	2
40	15	3	3
40	16	3	3
40	18	1.2	2.8
40	18	2	3
40	18	2.5	4
40	18	3	4
40	20	1	1.5
40	20	1	2
40	20	1.5	2
40	20	2	2
40	20	2	5.8
40	20	3	3
40	20	3	4
40	20	2	2.5
60	25	2	2.5
60	25	2.5	2.5
60	25	2.5	3
60	25	3	2.2
60	25	3	2.5
60	25	3	3
60	25	3	5
60	26	4	4
60	30	3	2.2
60	30	3	3.2
60	30	3	3
62	25	1.2	2
62	25	1.5	2
62	25	1.5	6
62	25	2	2.5
62	25	2	2.5
62	26	3	4
62	27	2	2
62	27	4	4
65	32	3	3
70	30	4	4
75	25	1.6	3.25
75	25	3.25	3
75	30	5	10
75	32	4	6.25
75	40	1.6	2
75	40	2.5	2.5
75	40	2.5	3
75	40	3	3
75	40	3	3.25
75	40	4	4
75	40	5	5
75	40	5	6
80	20	1.5	22
100	40	5	8
115	40	3.15	7
200	75	3.15	6

Custom sizes available on request. Material options: SS 304, SS 316, Mild Steel, Aluminium, Galvanised Steel.

Chain Link Fencing

Galvanised steel and PVC-coated fencing for security and perimeter protection

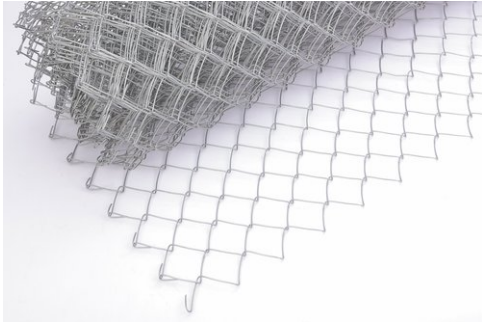

2-4 inch

Opening

2.5-4mm

Wire Dia

2-8 feet

Height

GI/PVC

Materials

KEY APPLICATIONS

- Industrial perimeter security
- Construction site fencing
- Agricultural boundary fencing
- Institutional campus enclosures
- Sports ground and playground fencing

AVAILABLE MATERIALS

- | | |
|----------------------|--------------------------|
| GI Wire | Galvanised iron |
| GI + PVC | PVC-coated for longevity |
| Commercial GI | 40-50 GSM zinc coating |
| Heavy GI | 90-275 GSM coating |

ORDER TYPE Ready Stock | Make to Order | Custom Specifications

Download full technical datasheet at www.banaraswala.com/products

Chain Link Fencing — Product Range

Opening in	Wire Dia Gauge	Wire Dia mm	Material	Wt kg/sqft
2	8	4	GI	0.400
2	10	3	GI	0.225
2	12	2.5	GI	0.156
2	6	4+1	GI+PVC	0.540
2	8	3+1	GI+PVC	0.304
2	10	2+1	GI+PVC	0.135
2.5	8	4	GI	0.320
2.5	10	3	GI	0.180
2.5	12	2.5	GI	0.125
2.5	6	4+1	GI+PVC	0.432
2.5	8	3+1	GI+PVC	0.243
2.5	10	2+1	GI+PVC	0.108
3	8	4	GI	0.267
3	10	3	GI	0.150
3	12	2.5	GI	0.104
3	6	4+1	GI+PVC	0.360
3	8	3+1	GI+PVC	0.203
3	10	2+1	GI+PVC	0.090
3.5	8	4	GI	0.229
3.5	10	3	GI	0.129
3.5	12	2.5	GI	0.089
3.5	6	4+1	GI+PVC	0.309
3.5	8	3+1	GI+PVC	0.174
3.5	10	2+1	GI+PVC	0.077
4	8	4	GI	0.200
4	10	3	GI	0.113
4	12	2.5	GI	0.078
4	6	4+1	GI+PVC	0.270
4	8	3+1	GI+PVC	0.152
4	10	2+1	GI+PVC	0.068

ROLL SPECIFICATIONS: Length: 50 feet rolls | Height: 2 feet to 8 feet | Custom heights available

** All weights are approximate. Custom specifications available on demand.*

Pan-India Presence

2 factories + 5 branches = coverage across industrial India



Coimbatore (HQ)

Branch + Factory

Wire screen, woven mesh, perforated sheets

Mumbai

Branch + Factory

Welded mesh, expanded metal, perforated sheets

Chennai

Branch

Full product range — trading & distribution

Ahmedabad

Branch

Full product range — trading & distribution

Hyderabad

Branch + Factory

Full product range — trading, distribution & factory

Contact Us

Technical consultation | Sample requests | Custom specifications

Coimbatore (HQ)

coimbatore@banaraswala.com

+91 73395 53666

621 Trichy Road, ELGI Industrial Complex, Singanallur, Coimbatore, Tamil Nadu - 641005

Chennai

chennai@banaraswala.com

+91 93612 73366

New No.22, Old No.323, Thambu Chetty Street, Parrys, Chennai, Tamil Nadu - 600001

Hyderabad

hyderabad@banaraswala.com

+91 93915 85658

07-016/A/430, SY No.240, Subash Nagar, Jeedimetla Village District, Medchal - Malkajiri, Hyderabad, Telangana - 500055

Mumbai

mumbai@banaraswala.com

+91 99876 16364

Plot No.5, M.I.D.C Taloja, Opp. Hindalco Industries Ltd., Beside Tanish Hotel, Panvel Taluk, Raigad, Navi Mumbai, Maharashtra - 410208

Ahmedabad

ahmedabad@banaraswala.com

+91 93767 31234

A Namrata Industrial Estate, Nagarvel Hanuman Road, Amraiwadi, Ahmedabad, Gujarat - 380026

[Request a Quote](#) | [Technical Consultation](#) | [Request Samples](#)

www.banaraswala.com

ALSO FROM BWM: [Woven Wire Mesh](#) | [Welded Mesh](#) | [Vibrating Screen](#) | [Perforated Sheets](#) | [Expanded Metal](#) | [Chain Link Fencing](#)





BWM

**The Right Mesh.
The Right Spec.
The Right Time.**

woven to perfection

BANARASWALA WIRE MESH P LIMITED

www.banaraswala.com

